


HIGH PURITY F3 CONSTANT FLOW FAUCET

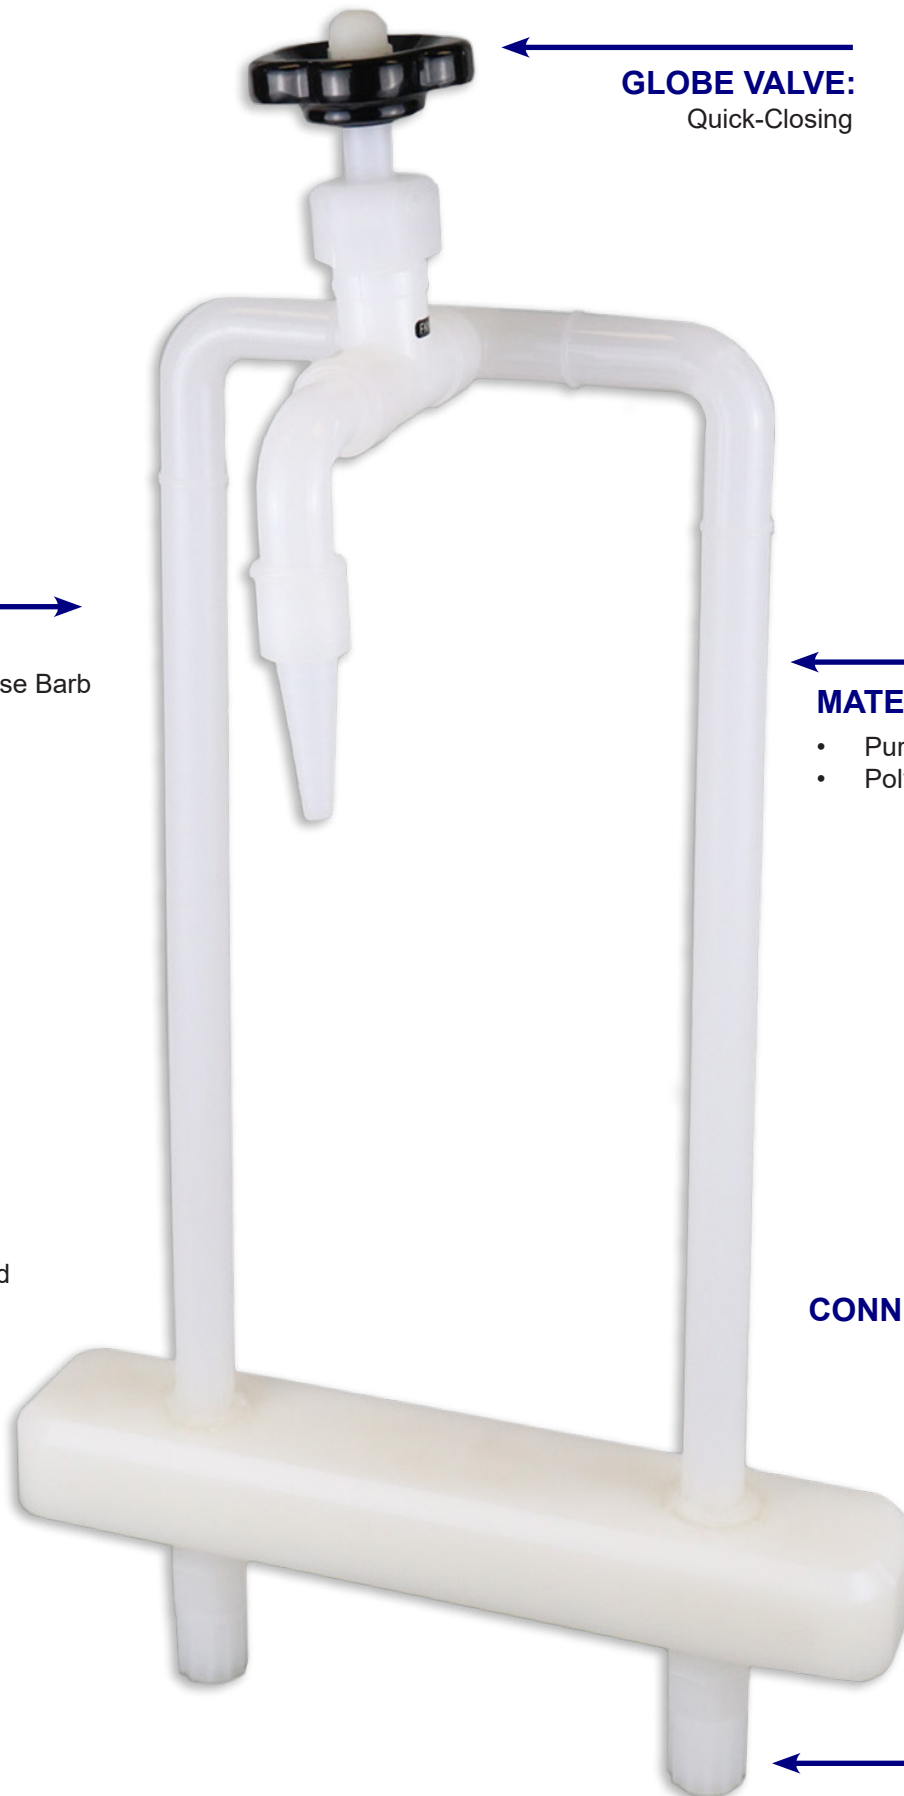

GLOBE VALVE:
Quick-Closing

OUTLET:

1/4" - 1/2" Universal Hose Barb

MATERIALS:

- Purad® UHP PVDF
- PolyPure® PPn

MATERIALS:

- 7" Spacing standard
- Threaded inserts
- Custom options available

CONNECTION OPTIONS:

- Spigot end
- Socket end
- Union
- MNPT/FNPT
- Flare adapter
- Sanitary adapter


HIGH PURITY F3 CONSTANT FLOW FAUCET

SAMPLE SPECIFICATION:


Constant flow gooseneck faucets shall be constructed of high purity Purad® PVDF or PolyPure® Natural PP. Faucets shall be supplied with quick-opening globe valve. Mounting shall be deck located. Gooseneck discharge shall be provided with universal 1/4" through 1/2" hose barb connection. Faucets shall be provided with union, NPT, sanitary, butt fusion connections.

Mounting: Recommended deck/wall mounting hole is 1-1/4". Threaded inserts are 1/4" - 20.

FLOW CHARACTERISTICS:

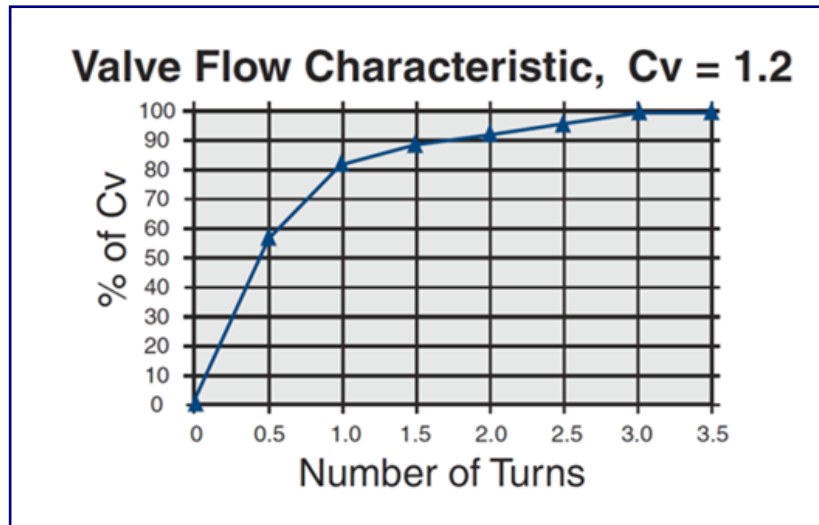

MODEL CONFIGURATOR:

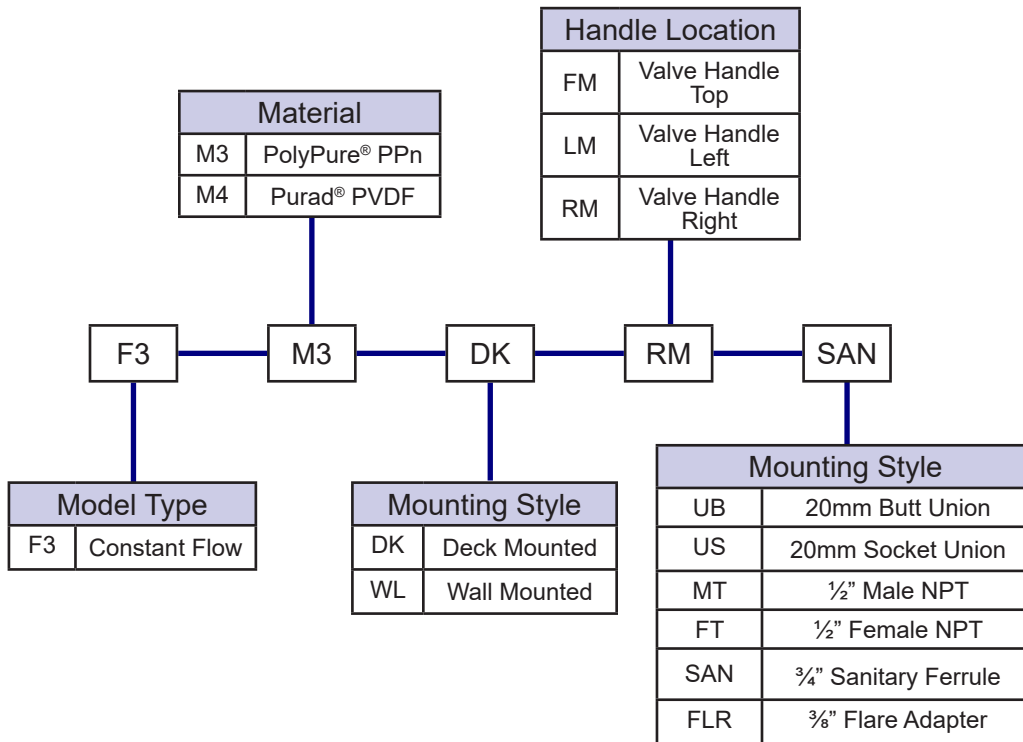

HIGH PURITY F3 CONSTANT FLOW FAUCET

SAMPLE ENVELOPE DIMENSIONS:

Please note, custom options are available. Some dimensions may vary depending on connection method.

